

# PSD series power supply

## Desktop type power supply 52V DC



CODE: **PSD520175** v1.0/I  
 TYPE: **PSD 52V/1,75A Desktop type power supply for CCTV**

EN

### Features of the power supply:

- power output 1,75 A/52 V DC\*
- universal input voltage range ~100-240 V
- high efficiency 92%
- standby power <0,2 W
- efficiency level: VI
- protections:
  - SCP short-circuit protection
  - overvoltage protection (AC input)
  - overload (OLP)
- warranty – 2 year from the production date




### DESCRIPTION

The power supply is intended for supply cameras that require stabilised voltage of **52 V DC**. The unit has a cable with a DC5.5/2.1 plug. The power supply unit is protected against short-circuit, overload and overvoltage.

### TECHNICAL PARAMETERS

|   |   |
|---|---|
| Supply voltage  | ~100-240 V; 50/60 Hz  |
| Current consumption                                       | 2-1 A   |
| Supply power  | 90 W max.   |
| Efficiency  | 92 %  |
| Output voltage  | 52 V DC   |
| <b>Output current <math>t_{AMB}&lt;30^{\circ}C</math></b> | <b>1,75 A - refer to graph 1.</b>   |
| <b>Output current <math>t_{AMB}=40^{\circ}C</math></b>    | <b>1,2 A - refer to graph 1.</b>  |
| Ripple voltage  | 150 mV p-p max.   |
| Short-circuit protection SCP                              | electronic, automatic recovery  |
| Overload protection OLP                                   | 150-200% of power supply, automatic recovery  |
| Operation conditions                                      | temperature $-10^{\circ}C \div +40^{\circ}C$<br>relative humidity 20%...90%, without condensation |
| Dimensions (LxWxH)  | 132 (150) x 61 x 32 [mm]  |
| Net/gross weight  | 0,37kg / 0,40kg   |
| Protection class PN-EN 60950-1:2007                       | II (second)   |
| Length of DC cable  | 1,2m + plug DC5,5/2,1 female  |
| Length of AC cable  | 1,5m + mains plug   |
| Storage temperature                                       | $-20^{\circ}C \dots +60^{\circ}C$   |
| Declaration, warranty                                     | CE, 2 year from the production date   |

\* In order to extend the life of the power supply, the load current of 1,2 A is recommended.

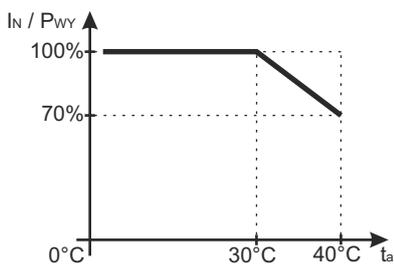

Graph 1.  
Relation between output current and ambient temperature (instantaneous load).


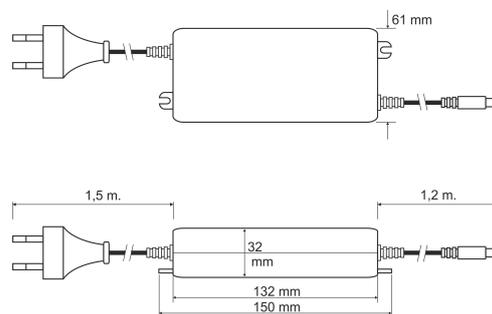


Fig. 1. Dimension of power supply.

### ACCESORIES

ACCESORIES:  
 [1] adapter CABLE - PLUG DC 5,5/2,1 - code ML109

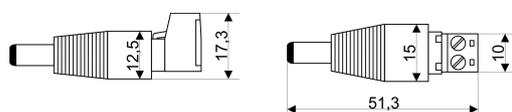

For power supplies are available accessories - fuse blocks and cable adapter. For details –visit [www.pulsar.pl](http://www.pulsar.pl).

\* Refer to graph 1